


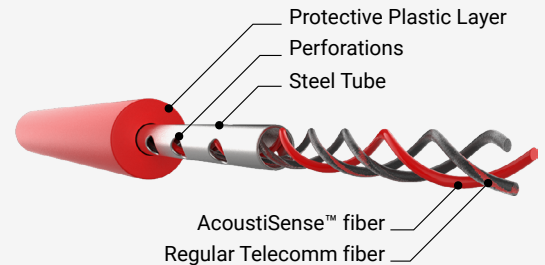


# Sonosens

## Technical Datasheet

The SonoSens cable is designed to enhance the acoustic transmission for professional DAS (Distributed Acoustic Sensing) Applications. It is protected with a metallic layer, which provides a robust cable design for the maximum lifetime of the final application. The SonoSens cable transmits up to 40% more detectable signal than comparable products. This makes SonoSens a practical product for a wide range of acoustic sensing projects and combines mechanical protection and acoustic sensing performance all in one.




**Figure A**  
Standard SMF (SNR)

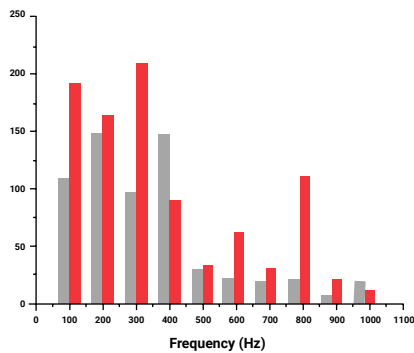

■ Sonosens    ■ Solid FIMT

Telecom-grade fiber sensing: After applying a standardized SNR scale (Y-axis), when utilizing telecom-grade single-mode fibers for sensing, the SonoSens showed measurable SNR Improvement at all studied frequencies except for 400 Hz. This observation suggests a resonant frequency for the FIMT near 400 Hz. (Figure A)


**Figure B**  
Acoustisens SMF (SNR)

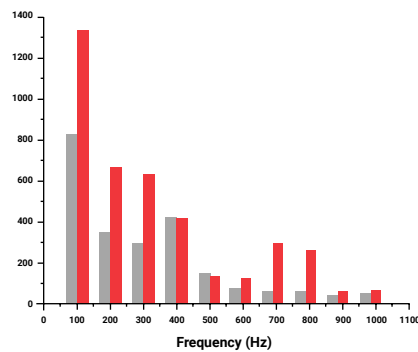

AcoustiSens fiber sensing: Again, using the same standardized SNR scale (Y-axis), when utilizing AcoustiSens enhanced Rayleigh backscatter fibers for sensing, in all measurements, the AcoustiSens shows significant SNR improvement. When combined with SonoSens, the SNR improvements exhibit additional SNR improvement at most tested frequencies. Notably, the response at 400 Hz favors typical solid FIMT construction. (Figure B)

Sonosens

### Sonosens

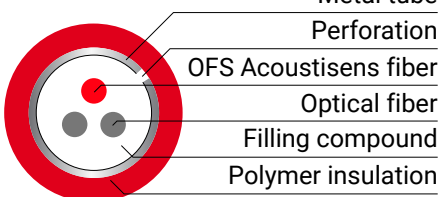

## Product Specification

Values stated at room temperature  
(+20°C/68°F)

### General Characteristics (without polymer cladding)

|                                       |                        |                |
|---------------------------------------|------------------------|----------------|
| Total cable weight                    | 23 kg/km               | 15.46 lbs/kft  |
| Outer diameter                        | 4.00 mm                | 0.157"         |
| Number of fibers                      | 3                      |                |
| Rayleigh enhanced fiber type (G657A1) | 1x Acoustisens™ by OFS |                |
| Telecom fiber type                    | 2x G652D/G657A1        |                |
| Storage temp. range                   | -50°C ... +80°C        | -58°F...+176°F |
| Operational temp. range               | -40°C ... +80°C        | -40°F...+176°F |

### Tube Characteristics

|                  |                |                 |
|------------------|----------------|-----------------|
| Outer diameter   | 2.30mm         | 0.091"          |
| Inner diameter   | 1.90mm         | 0.075"          |
| Material         | 2.4858         | 825             |
| Hole dimensions  | 0.90 x 1.40 mm | 0.035 x 0.055 " |
| Ohmic resistance | ~ 0.83 Ohm/m   | 0.25 Ohm/ft     |

### Polymer Sheath Characteristics

|                |                     |        |
|----------------|---------------------|--------|
| Outer diameter | 4.00 mm             | 0.157" |
| Inner Diameter | 2.30 mm             | 0.091" |
| Material       | PVC / RAL3000 (red) |        |

### Mechanical characteristics

|   |                           |                           |
|---|---------------------------|---------------------------|
| Ultimate tensile strength*                      | > 560N                    | >125 lbs                  |
| Max. operational tensile force* (ends fixed)    | 220N                      | 50 lbs                    |
| Crush resistance*                               | >8kN/100mm                | >1800lbs/3.93"            |
| Min. bending radius (before kink; without load) | > 160 mm                  | > 6.3"                    |
| Max. hydrostatic pressure*                      | > 80 bar                  | > 1.16 kPSI               |
| Temperature coefficient (inner tube)            | 14.1*10 <sup>-6</sup> K-1 | 14.1*10 <sup>-6</sup> K-1 |
| E-Module* (inner tube)                          | 195 kN/mm <sup>2</sup>    | 195 GPa                   |

### Acoustic performance (using AcoustiSens fiber)

|                          |                 |
|--------------------------|-----------------|
| Operating Range          | 1536 – 1556 nm  |
| Target measuring window  | 100 Hz to 1 kHz |
| Enhancement <sup>1</sup> | 10-15 dB        |

<sup>1</sup>Compared to naturally occurring Rayleigh backscatter in G657A1 fiber

- Connectors for both ends available on request
- Length based on customer request
- Meter marking on sheath print available
- Various sheath colors and marking options available upon request



Visit our website for more details

Speak to an Expert  
+43 2852 30412



## Packaging and single Length

Standard packaging consists of wooden reels in a standing position fixed on pallets. The outer layer is protected with bubble foil and flexible cardboard. Optionally, spools provided by customer can be used. Produced single lengths are tailored to meet customer requests.